
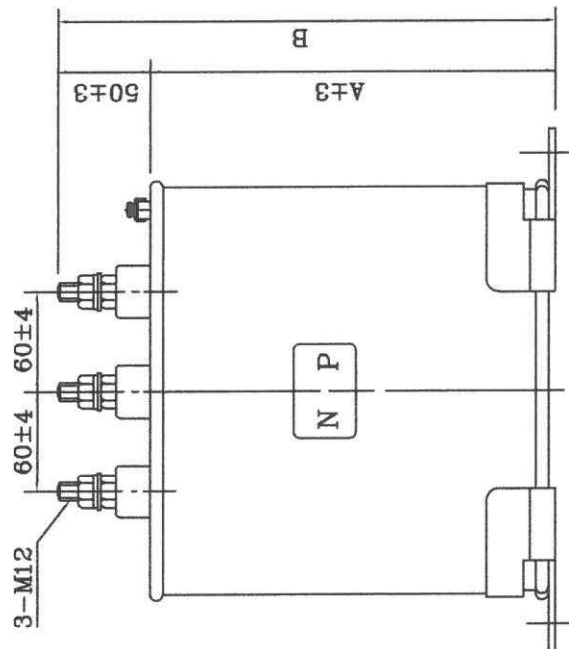


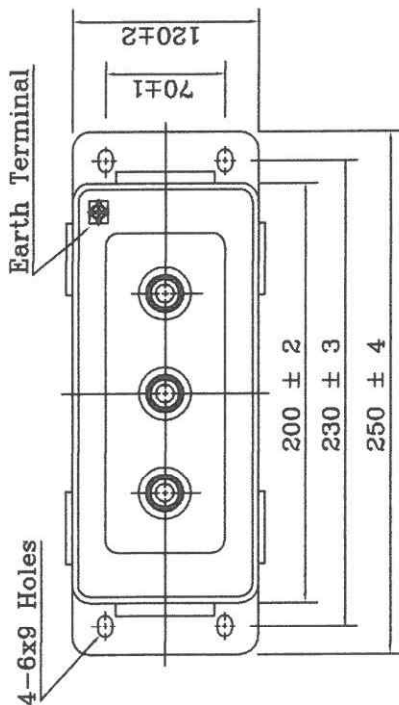


Table

No	VAC	Type	Capacity		Current(A)	Dimension(mm)		Note
			mfd	Kvar		A	B	
1	480	ANU-48240K3	652.62	40	48.1	290	340	K480-024
2	480	ANU-48350K3	690.78	50	60.1	340	390	K480-025
3	500	ANU-50250K3	636.62	50	57.7	340	390	K50B-001
4	600	ANU-60280K3	442.10	50	48.1	360	410	K60B-001
5	690	ANU-69250K3	334.29	50	41.8	300	350	K69B-001
6	220	ANU-22230K3	1873.0	30	78.3	300	350	K22B-001
7	720	ANU-72250K3	307.0	50	40.1	390	440	K72B-001
8	760	ANU-76250K3	232.94	50	38.5	390	430	K76B-001
9	660	ANU-66250K3	365.37	50	43.7	340	390	K66B-001
10	860	ANU-86250K3	215.19	50	33.6	360	410	K86B-001

*Note: Three Phases & Delta Connection

SPECIFICATIONS

- | | |
|--|--|
| 1. Rated Voltage | : See Table |
| 2. Rated Frequency | : 50Hz |
| 3. Installation Place | : Indoor type |
| 4. Ambient Temperature | : -25°C to + 55°C |
| 5. Peak inrush current | : 200 x In |
| 6. Ability
Permissible over Voltage
Permissible over Current | : 130% of the Rated Voltage (Less than 1 minute)
: 150% of the Rated Current
(including combined overvoltages and capacitance) |
| 7. Tolerance of Capacitance | : -5% to +15% of Rated Value |
| 8. Dielectric losses | : <0.2W/KVAR |
| 9. Total losses | : <0.5W/KVAR |
| 10. Withstanding Voltage
Between Terminal and Terminal : R.V X 2.15 VAC, 10Sec
Between Terminal and Case | : 3000VAC 10Sec |
| 11. Impulse | : 8kv |
| 12. Insulation Resistance | : 1000MegOhm and up at 20°C
Between Terminal and Case |
| 13. Sealing Ability | : No Oil leaks at 70°C Constant Temperature |
| 14. Discharge Resistor | : Reduces Terminals Voltage to 50V or less
With in one minutes after disconnection |
| 15. Built in Safety Device | : Self-healing+Pressure-sensitive
disconnector (on all three phases) |
| 16. Reference Standard | : IEC 60831 |
| 17. Humidity | : 95% |
| 18. Climate | : Tropicalization |
| 19. Altitude | : 2000m above sea level |
| 20. Painting Color | : Munsell 5Y 7/1 |
| 21. Inner Connection | : φ φ φ |



R : Discharge Device
F : Protection Device
C : Capacitor

[illegible]