


Technical data sheet Combination arrestor, 1-pole NPE

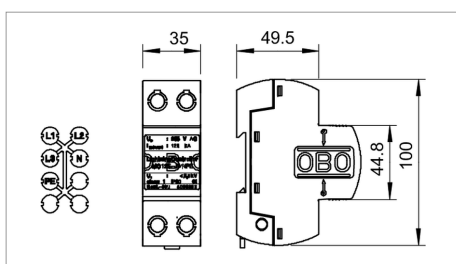

arrestor for use in TN-S and TT systems.

MCD 125-B/NPE: as coordinated N-PE discharge gap, Type 1 (Class B) IEC 61643. For interface 0 to 1 (LPZ) according to lightning protection zone concept to IEC 61312-1 and/or DIN VDE 0185-305 for use as discharge gap between N and PE.


- Protection capability 125 kA 10/350 μ s
- Conforms to VDN Directive, 2nd Edition 2004
- Including plug caps for identifying the connections
- Protection level • Enclosed, non-extinguishing discharge gap: can be used in normal commercial distributor housings

Application example: compact overvoltage protection concepts in a separate housing. Installation of arrestors of requirement Class B+C in a distributor without decoupling inductivity and/or line lengths, e.g. direct on mobile radio system.

Type	Maximum continuous voltage V	Version	Pack Units	Weight kg/100 pc.	Art.-No.
MCD 125-B NPE	255	NPE	1	46.500	5096865

/pc.

Connection-/Circuit diagram

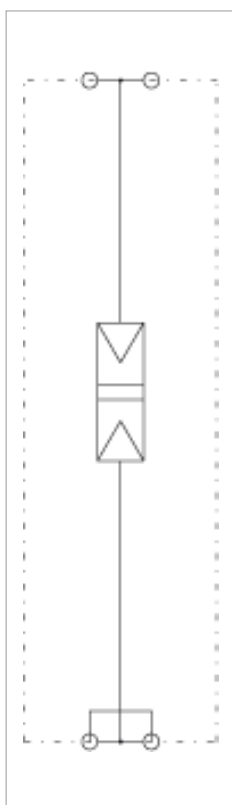

Article number	5096865		
Nominal voltage	U_N	V	230
SPD to EN 61643-11	Type 1		
SPD to IEC 61643-1	class I		
LPZ	0~2		
Lightning impulse current (10/350)	I_{imp}	kA	125
Nominal discharge surge current (8/20)	I_n	kA	125
Arrester surge current (8/20) [total]		kA	125
Voltage protection level	U_p	kV	<1,3
Response time	t_A	ns	<100
Follow current quenching capacity I_{peak}	$I_{fi peak}$	kA	0.1
Temperature range	ϑ	°C	-40
Division unit TE (17.5 mm)	2		
Protection rating	IP 20		
Connection cross-section, rigid		mm ²	10
Connection cross-section, multi-wire		mm ²	10
Connection cross-section, flexible		mm ²	10

Legend



230/400 V-system



Protection device to DIN EN 61643-11 or IEC 61643-11



Transition from LPZ 0 to LPZ 2



Communautés Européennes, EC declaration of conformity according to EC directives



Russia, GOST The State Committee for Standards



5-year warranty